



FIXOBON CL

PRODUCT CODE : 605

**HI-GLOSS COLOURED LACQUER
FOR PAVERS, CEMENT TILES AND STONE SURFACES**

DESCRIPTION

FIXOBON CL creates a deep penetrating barrier coating which protects and improves surfaces by giving a shinier, Beautiful and Customised choice of colours to tiles, stones, slates etc. It provides a protective barrier on porous surfaces which resists chemical attack and eliminates dusting.

COMPOSITION

FIXOBON CL is a one pack colourless Acrylic coating which provides integral protection to paver blocks, tiles, slates etc.

ADVANTAGES

- **FIXOBON CL** penetrates the capillary structure and provides a tough and clear protection.
- **FIXOBON CL** is UV resistant.
- **FIXOBON CL** on drying forms a glossy film.
- **FIXOBON CL** is resistant to oil, grease and stains.
- **FIXOBON CL** Coat is free from IMPURITIES
- **FIXOBON CL** can be applied by even unskilled labourers.

TYPICAL APPLICATION

FIXOBON CL is highly recommended and Premium choice for getting Durable Beautiful and Protective Coloured coating on Used, Old as well as new interlocking pavers, natural stones and slates.

DIRECTION FOR USE

FIXOBON CL can be applied with a hard sponge or a soft brush. One coat will seal, protect and make surface dust free. Additional coats will enhance gloss. Apply second coat after the first coat has dried off.

CAUTION :

Do not apply **FIXOBON CL** during bad weather or in direct sunlight.

CURING :

FIXOBON CL will dry to tack free within 10 minutes depending upon temperatures and ventilation. However it will take up to 12-24 hours to get fully cured and perfectly set coating.

PROPERTIES

Service Temp :	0°C to 60°C
Flash Point :	Over 25°C.
Specific Gravity :	0.8 at 20°C
Viscosity :	-25 seconds on ford cup No.4 @ 20°C

WATCH POINTS

Ensure adequate ventilation during application.

COVERAGE

FIXOBON CL will give a coverage of approx.80 -100 sq.ft / 1 ltr per coat depending upon porosity of the surface. Normally two coats are recommended for Extraordinary Results.

HEALTH AND SAFETY

FIXOBON CL has a low toxicity, but avoid ingestion. Do not induce vomiting if swallowed and seek immediate medical attention. Wear protective gloves during handling and remove splashes on skin with soap water. Wear goggles and in the event of splashes wash eyes with copious amount of water for 10-15 minutes. Ensure adequate ventilation. USE OF MASK IS A MUST FOR APPLICATOR.

PACKING AND STORAGE


- **FIXOBON CL** is available in 20 ltr & 50 ltr containers.
- **FIXOBON CL** can be stored between 10°C and 45°C. Preferably store at below 25°C. Keep away from sources of ignition and foodstuffs.

SHELF LIFE

FIXOBON CL best results use before 6 months in unopened condition.

DISCLAIMER

ROKSO warrants that all products are free from any defects of manufacture and comply with the specifications given in their respective technical data sheet. No warranty can be given as to the results of use because conditions of use, such as site conditions, surface preparations, workmanship, weather, structural issues and other factors are beyond the control of **ROKSO**. Purchaser agrees to seek the advice of qualified professionals to carry out tests & take trials to determine the suitability of products for their intended purpose prior to full scale usage of **ROKSO** products and assumes all risks. The company does not assume any liability for unsatisfactory results, arising from the use of our products. Purchaser's sole liability is limited to replacement of product or refund of the purchase price paid if any product proven defective. No other warranties, express or implied, shall apply including any warranty of merchantability or fitness for a particular purpose. **ROKSO** shall not be liable for any consequential damages arising from the use of our products for unsatisfactory results.

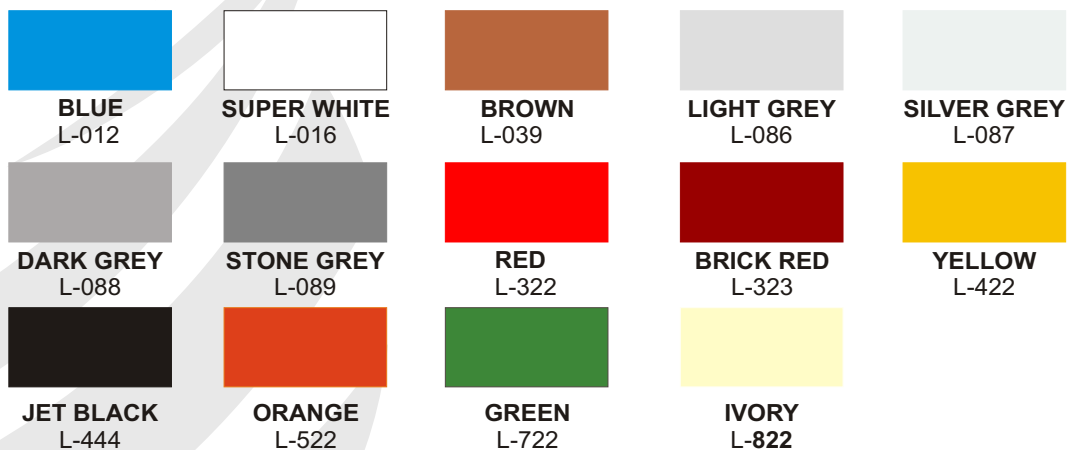

* The Colour chips on this card show approximate colours only.

* Special shades are available on request.

Manufactured in INDIA by
ROKSO INDIA PRIVATE LIMITED

AN ISO 9001 : 2015 CERTIFIED COMPANY

ADMN.OFFICE: 605,SAI JANAK CLASSIC,ABOVE MURLIDHAR SWEETS, NEAR FLYOVER BRIDGE, DEVIDAS LANE, BORIVALI (W) MUMBAI-92
REGD OFFICE : 202,MADHUVAN,SHRI KRISHNA COMPLEX,NR.SHRIRAM NAGAR,VIVA COLLEGE RD,VIRAR(WEST) DI :PALGHAR -401303 MS
E-MAIL : info@roksoindia.com / WEB SITE : www.roksoindia.com

The data & guidelines provided hereabove is based on compiled information which we believe reliable. Users are requested to test all the applications independently before commercial use. This data & informations are non binding & we donot assure any liability for failure of any guidelines or performance of the product as correct identification of the problem, quality of the other materials & on-site workmanship are factors beyond our control.